


# ベアリングホルダーセット 直接取り付けタイプ 四角型

Bearing Holder Set Direct installation Type Square style

ボールベアリングをホルダーへセットしたタイプです。

RoHS指令適合品




BSM

- ① 鋼材S45C
- ② 鉛フリー無電解ニッケルメッキ  
Electroless Nickel plating
- ③ ベアリング鋼 Steel



BSS

- ① ステンレスSUS304  
Stainless steel
- ② ステンレス製  
Stainless steel

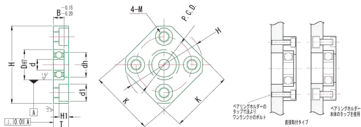

寸法表

品番	△/リソ?	品番	△/リソ?	d	D(H7)	許容差	B	H	K	T	dh	P.C.D.	M(下孔)	dI	HI	(G)
BSM	60522			5	14	+0.018 0	5	36	30	7	10	26	M 5 × P0.8 (4.3)	8.0	4.4	36
	62522			16	38		31	12	28	40						
	60622			17	39		32	8	13	29	46					
	62622			6	41	34	15	31	53							
	60822			8	45	36	9	18	35	72						
	62822			22	47	37	10	20	37	83						
	690022	BSS	690022		22	6	45	36	8	19	35	89				
	600022		600022		10	26	8	50	39	10	22	40				94
	620022		620022		30	9	54	42	11	24	44	122				
	690122		690122		24	6	48	38	8	21	38	71				
	600122		600122		12	28	8	52	40	10	24	42				96
	620122		620122		32	+0.025 0	10	56	43	12	26	46				127
690222		690222		28	+0.021 0	7	57	45	9	25	45	106				
600222		600222		15	32	9	60	46	11	28	48	125				
620222		620222		35	11	64	49	13	29	52	180					
690422		690422		37	+0.025 0	9	69	54	11	34	56	166				
600422		600422		20	42	12	77	59	14	36	64	254				
620422		620422		47	14	81	62	16	40	68	346					
600522		600522		25	47	12	88	67	14	41	72	333				
620522		620522		52	15	94	72	17	45	78	468					
600622		600622		30	55	13	96	73	15	48	80	411				
620622		620622		62	+0.030 0	16	104	79	18	55	88	589				
600722		600722		35	62	14	104	79	16	55	88	500				
600822		600822		40	68	15	114	86	17	60	96	630				