

ベアリングホルダーセット インロー止め輪タイプ 丸型

Bearing Holder Set Inlay ring Type Circle style

インロー加工がしてある為、シャフトの芯出しが簡単に決まります。

RoHS指令適合品




BCIM

- ① 鋼材S45C
- ② 鉛フリー無電解ニッケルメッキ
Electroless Nickel plating
- ③ ベアリング鋼 Steel



BCIS

- ① ステンレスSUS304
Stainless steel
- ② ステンレス製
Stainless steel

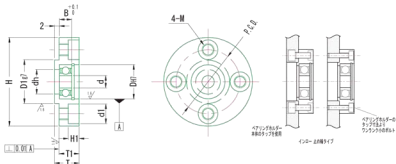

寸法表

品番	ベアリング	d	D (H7) 許容差	B	H	h	T1	dh	D1 (g7) 許容差	FCD	M (下孔)	dI	HI	(R)		
BCIM	600022	22	+0.021 0	6	45	11	9	19	27	-0.007 -0.004	35	M 5 × P0.8 (4.3)	8.0	4.4	99	
	600022	10		8	50	13	11	22	32	-0.009	40				149	
	620022	30		9	54	14	12	24	36	-0.004	44				178	
BCIS	690122	24	+0.020 0	6	48	11	9	21	30	-0.007 -0.004	38	M 6 × P1.0 (5.2)	9.5	5.4	111	
	600122	12		8	52	13	11	24	34	42	147					
	620122	32	10	56	15	13	26	38	46	217						
	690222	28	7	57	12	10	25	35	45	171						
	600222	15	9	60	14	12	28	38	-0.009 -0.004	48	210					
	620222	35	11	64	17	15	29	42	52	301						
	690422	37	9	69	15	13	34	45	56	296						
	600422	20	12	77	18	16	36	50	64	M 8 × P1.25 (6.8)	11.0				6.5	434
	620422	47	14	81	20	18	40	54	68	566						
	600522	25	12	88	18	16	41	54	72	585						
	620622	52	+0.030 0	15	94	22	20	45	60	-0.010 -0.040	M10 × P1.5 (8.5)	14.0	8.6	838		
	600622	30		13	96	20	18	48	62					80	766	
	620622	62		16	104	23	21	55	70					88	1,054	
	600722	35		14	104	21	19	55	70					88	935	
	600822	40		15	114	23	21	60	76					96	1,225	