

# ベアリングホルダーセット インローダブル直接取付タイプ 楕円型

Bearing Holder Set Inlay double direct installation type Ellipse style

2個のベアリングを使用している為、耐荷重の必要な箇所に最適です。

RoHS指令適合品



DEM

H1 鋼材S45C


H2 鉛フリー無電解ニッケルメッキ

E Electroless Nickel plating

B ベアリング鋼 Steel



5764701947

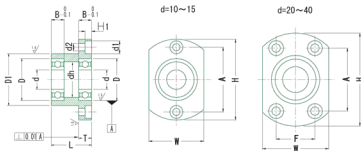

寸法表

Unit: mm

品番	ベアリング	L	d	D (H1) 許容差	B	H	W	T	dh	DI (E1) 許容差	A	F	d1	d2	H1	(G)	
DEM	6900Z2	25	22	+0.021 0	6	45	29	B	19	27	-0.007 -0.008	35	8.0	4.5	4.1	121	
	6000Z2	25	10		26	8	50		34	22	32	-0.009				40	186
	8200Z2	25	30		9	54	38		24	36	-0.034	44				278	
	6901Z2	30	24		6	48	31		21	30	-0.007 -0.008	38				144	
	6001Z2	25	12	28	8	52	36	24	34	42	204						
	6201Z2	30	32	10	56	40	26	38	46	298							
	6902Z2	25	28	+0.025 0	7	57	37	25	35	45	214						
	6002Z2	30	15	32	9	60	40	10	28	38	-0.009 -0.004	48	9.5	5.5	5.1	295	
	8202Z2	35	35	11	64	44	29	42	52	415							
	6904Z2	35	37	+0.025 0	9	69	47	34	45	51	24	404					
	6004Z2	40	20	42	12	77	54	11	36	50	56	32	11.0	6.6	6.1	516	
	6204Z2	45	47	14	81	58	40	54	59	34	834						
	6006Z2	40	47	12	88	58	41	54	63	36	750						
	6206Z2	45	52	15	94	64	45	60	68	39	1,047						
	6006Z2	40	30	55	13	96	66	13	48	62	-0.010 -0.040	70	40	14.0	9.0	8.1	964
	8206Z2	50	62	+0.030 0	16	104	74	55	70	77	44	1,486					
	6007Z2	50	35	62	14	104	74	55	70	75	44	1,350					
	6008Z2	60	40	68	15	114	82	60	78	80	54	1,820					