

スターノブ STK-N,STK-NT

Star Knobs STK-N,STK-NT

RoHS指令適合品




STK-N



STK-NT

材 ノブ knob : 黒色ポリプロピレン樹脂 Polypropylene plastic Black
ネジ screw : 黄銅C3604B brass

STK-40N,60N STK-25N,25NA

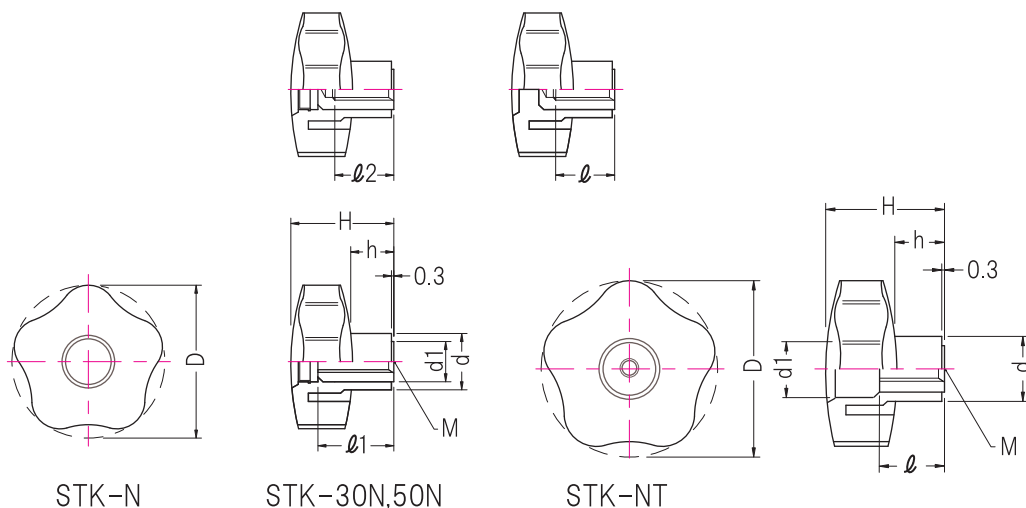

Unit : mm

| 品番 | D | M | l | l1 | l2 | d | H | h | d1 | (g) |
|-----------|----|-----------|----|----|----|----|----|----|----|-----|
| STK-25-N | 25 | M 4×P0.7 | 10 | - | - | 13 | 19 | 8 | 9 | 7 |
| STK-25-NA | | M 5×P0.8 | | - | - | | | | 12 | 6 |
| STK-30-N | 32 | M 6×P1.0 | - | 12 | - | 15 | 23 | 10 | 14 | 10 |
| STK-40-N | 40 | M 8×P1.25 | | - | 13 | 17 | 27 | 12 | 16 | 24 |
| STK-50-N | 50 | M10×P1.5 | | 20 | - | 19 | 32 | 14 | 19 | 34 |
| STK-60-N | 63 | M12×P1.75 | | - | 17 | 22 | 37 | 16 | 22 | 46 |

Unit : mm

| 品番 | D | M | l | d | d1 | H | h | (g) |
|-----------|----|-----------|----|----|----|----|----|-----|
| STK-30-NT | 32 | M 6×P1.0 | 10 | 15 | 10 | 23 | 10 | 7 |
| STK-40-NT | 40 | M 8×P1.25 | 12 | 17 | 12 | 27 | 12 | 6 |
| STK-50-NT | 50 | M10×P1.5 | 14 | 19 | 15 | 32 | 14 | 10 |
| STK-60-NT | 63 | M12×P1.75 | 16 | 22 | 19 | 37 | 16 | 24 |

注意事項 使用温度 max80°C min-20°C

ノブ